

Installation Instructions

Volvo V40 T2 1.5/2.0 Engine

Bluespark
AUTOMOTIVE



This product has been designed and manufactured to work correctly with installation as described in these instructions.

Failure to follow these instructions could result in damage to property, damage to the product and or potential injury.

It is very important that you read and understand these instructions thoroughly before installing this product.

Included Contents:

- Tuning Module
- Wiring Loom
- Fastening Ties
- Installation and User instructions
- Protective Bag For Module – (prevents damage to unit casing)



Before installation:

1. Open the vehicle's bonnet
2. Remove the ignition key
3. Close and lock the doors
4. Wait 5 minutes before removing any electrical plugs



Do not open the vehicle doors or unlock the vehicle while installation is in progress.

Installation Location:

The module should be installed between the vehicle's MAP and Boost sensors as shown in the diagram.

Locating the Unit:

The unit itself should be mounted away from:




Sources of Extreme Heat



Sources of Vibration



Sources of Spray Water

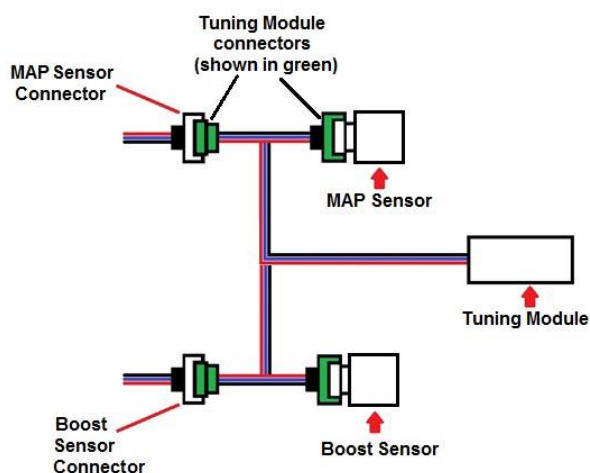

MIT3-B4-Pet26-767

Installation Instructions

Volvo V40 T2 1.5/2.0 Engine

Bluespark
AUTOMOTIVE


Step 1

Plastic engine cover



- Remove the plastic engine cover by releasing the fasteners, then the engine should look similar to the photo in Step 2.1.
- Familiarise yourself with the MAP sensor indicated in Step 2.1.

Step 2.1

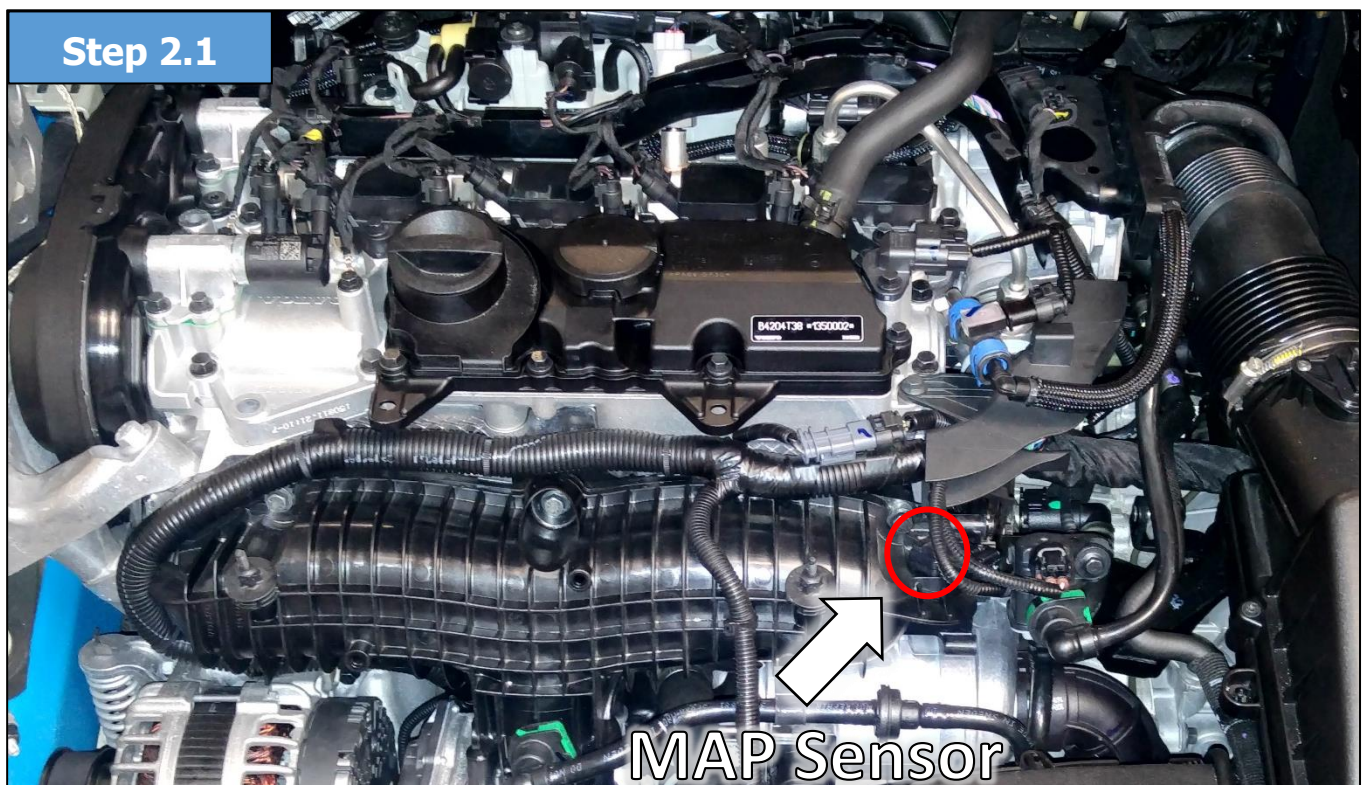


Installation Instructions

Volvo V40 T2 1.5/2.0 Engine

Bluespark
AUTOMOTIVE

Step 2.2

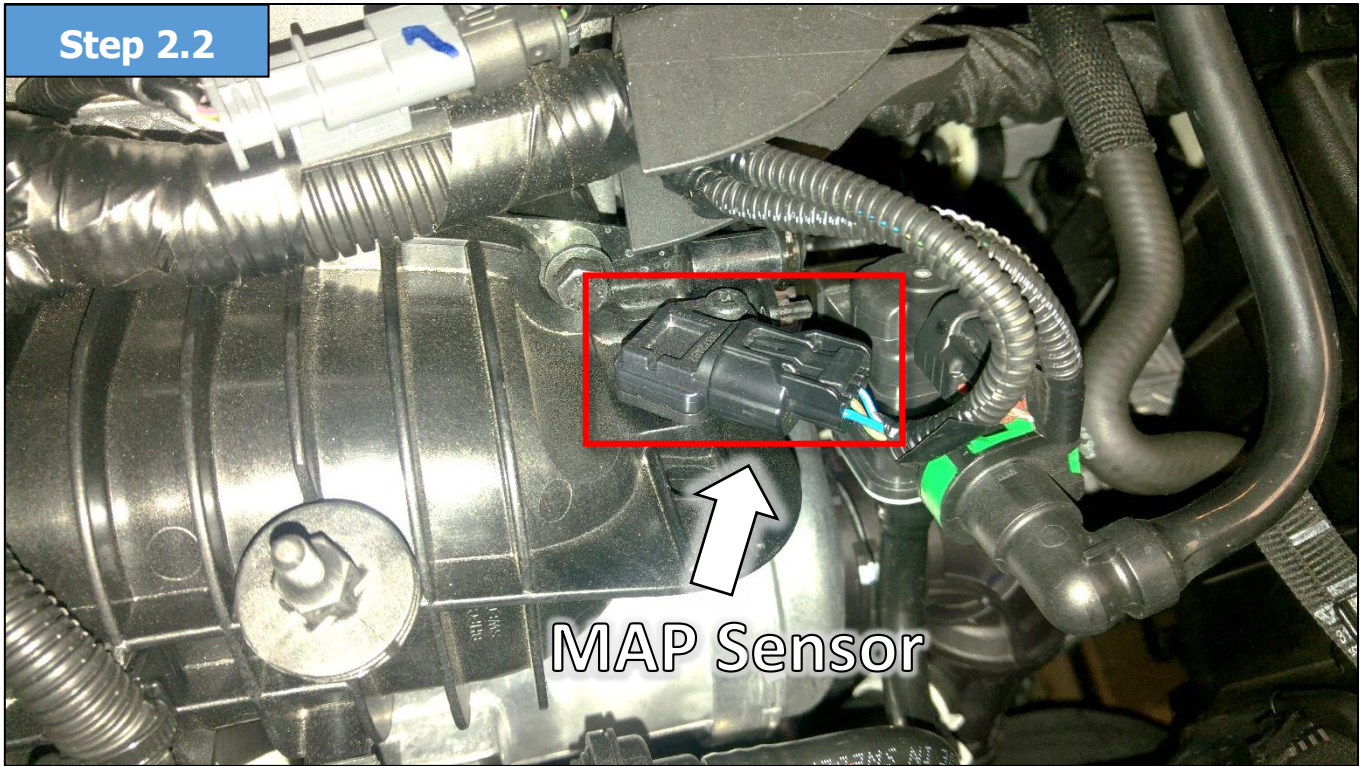


- Unplug the MAP Sensor connector (3 pin) by pressing down the releasing clip and pulling back the connector.
- Insert the connector from the Tuning Module's wiring loom into the MAP Sensor.
- Insert the Vehicle's MAP Sensor connector into the corresponding connector on the Tuning Module's wiring loom.

Installation Instructions

Volvo V40 T2 1.5/2.0 Engine

Bluespark
AUTOMOTIVE

Step 3

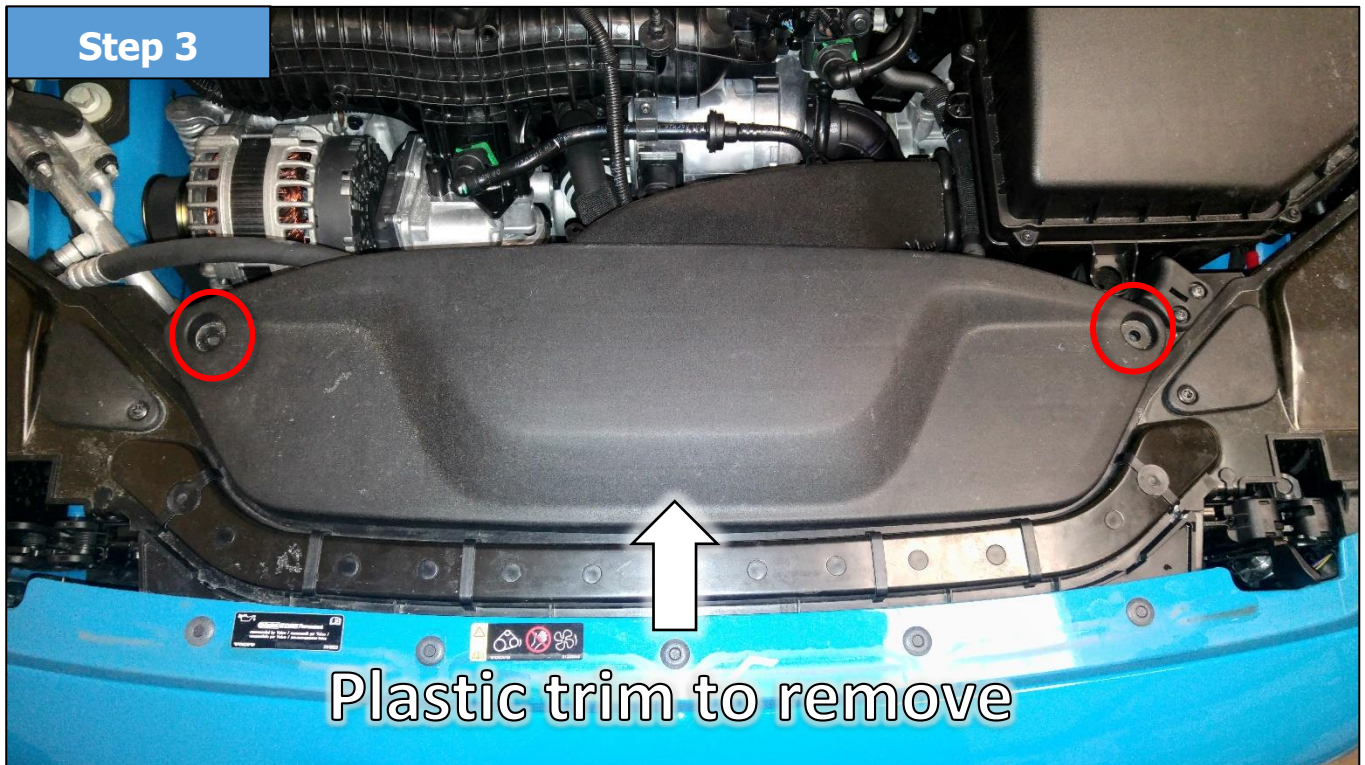

- Loosen the bolts securing the plastic trim highlighted in the image above, then remove it.

Step 4



- Move aside the cabling highlighted in the image to the left.
- We move the cabling to access another piece of plastic trim, removal of this is explained in Step 5.

Installation Instructions

Volvo V40 T2 1.5/2.0 Engine


Bluespark
AUTOMOTIVE

Step 5



- Following from Step 4 you access the plastic trim that is pictured to the left.
- The trim can be removed with firm pressure as it is not secured by bolts.

Step 6

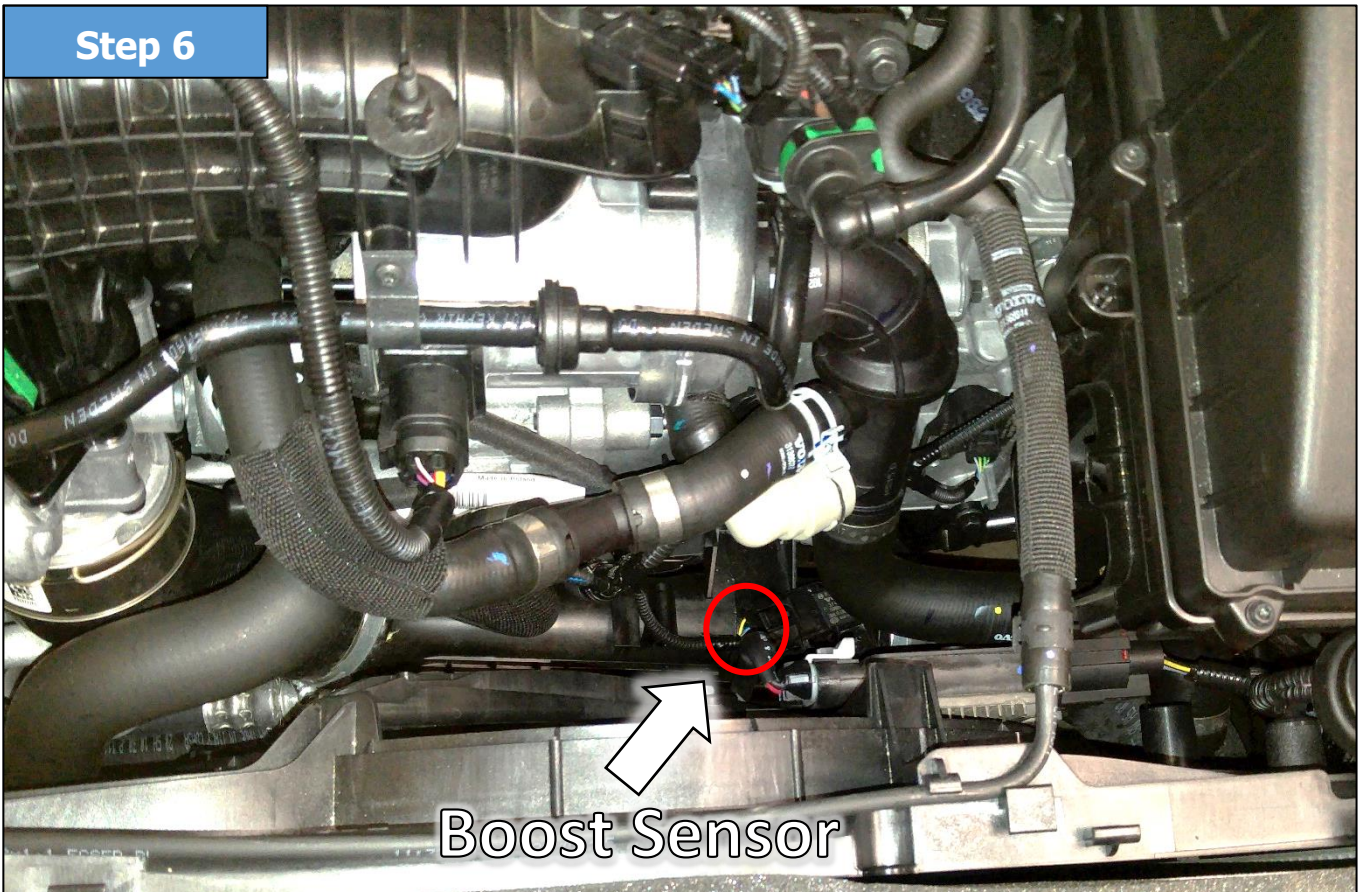


- Familiarise yourself with the Boost sensor indicated in the image above.

Installation Instructions

Volvo V40 T2 1.5/2.0 Engine

Bluespark
AUTOMOTIVE

Step 7

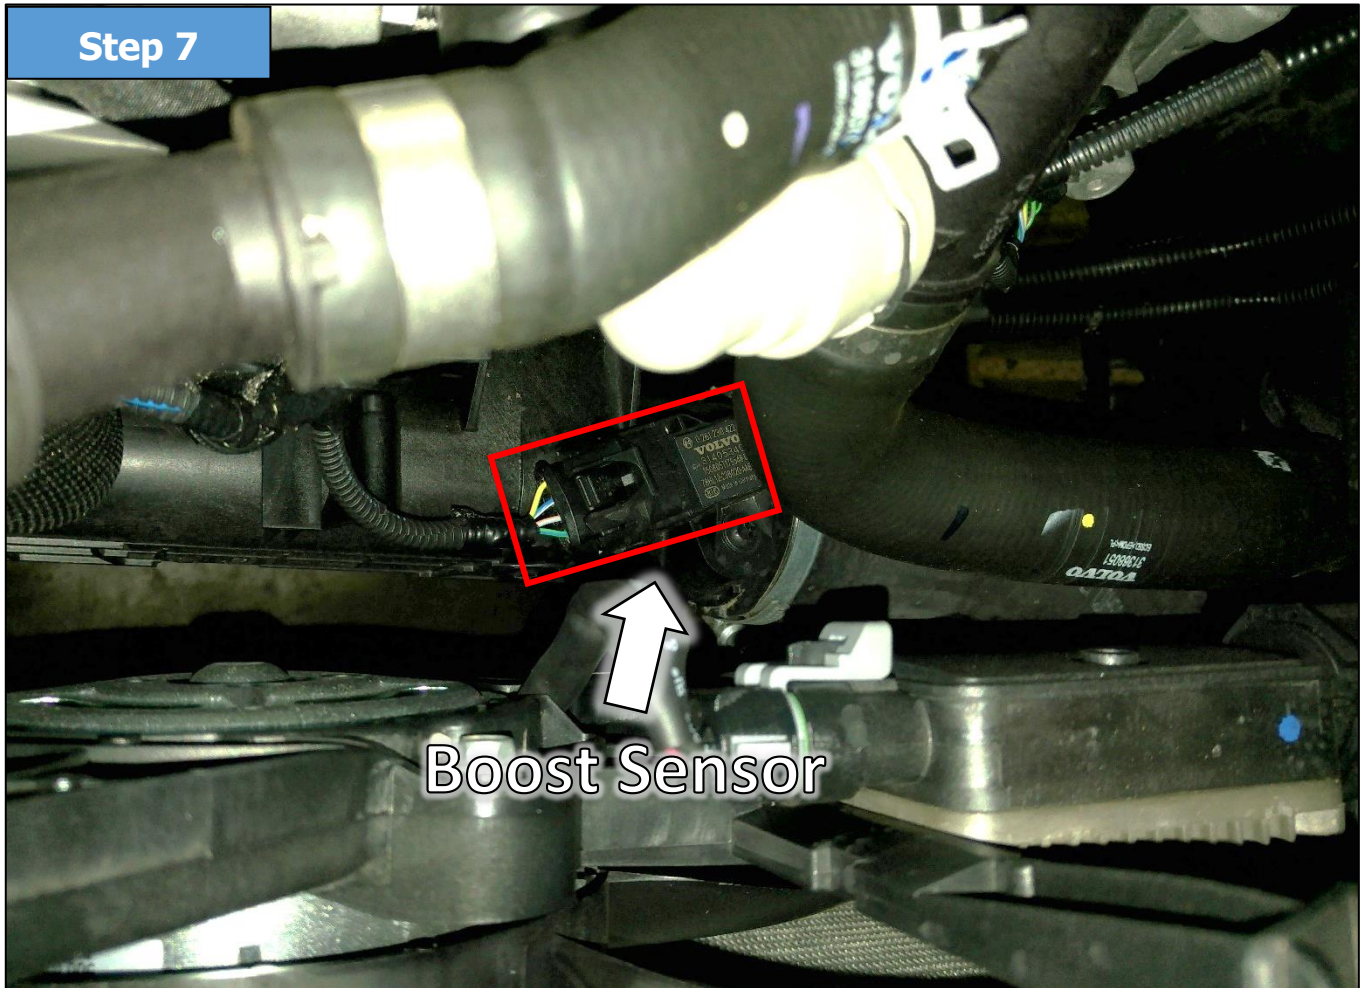

- Unplug the Boost Sensor connector (4 pin) by pressing down the releasing clip and pulling back the connector.
- Insert the connector from the Tuning Module's wiring loom into the Boost Sensor.
- Insert the Vehicle's Boost Sensor connector into the corresponding connector on the Tuning Module's wiring loom.
- Secure the Boost wiring loom using the included cable ties.

Installation Instructions

Volvo V40 T2 1.5/2.0 Engine



Step 8

- With the unit successfully installed please secure the unit and wiring loom within the engine bay, paying attention to the guidelines highlighted on Page 1.



Route the tuning box wiring harness away from sources of heat (exhaust manifolds, EGR pipes, most stainless steel pipes) and also away from any rotating parts such as belts.

- Double check all connections are correct and firmly connected. If this is the case, start the vehicle and ensure there are no engine warning lights or error messages displayed.
- Re-install the undertray and place the engine cover back over the engine making sure it clips in to place.

If everything is as it should be, please feel free to take the vehicle out for a test drive and enjoy the added responsiveness and power added to your vehicle by the Tuning Module.